


IT	UK	FR	ES	DE
<ul style="list-style-type: none"> <li>- Acciaio</li> <li>- Acciaio inox</li> <li>- Staffe a parete</li> <li>- Valvola di sfogo</li> <li>- Kit copritubo</li> <li>- Valvola e delimitatore mod. Quadro Pg 259</li> <li>- Raccordi</li> </ul>	<ul style="list-style-type: none"> <li>- Steel</li> <li>- Stainless steel</li> <li>- Wall brackets</li> <li>- Exhaust valve</li> <li>- Tube cover kit</li> <li>- Valve/holder Quadro, Pg 273</li> <li>- Connection</li> </ul>	<ul style="list-style-type: none"> <li>- Acier</li> <li>- Acier inox</li> <li>- Supports muraux</li> <li>- Soupape de decompression</li> <li>- Kit co-couver tube</li> <li>- Valve et raccord réglable Quadro, Pg 287</li> <li>- Raccords</li> </ul>	<ul style="list-style-type: none"> <li>- Acero inoxidable</li> <li>- Soportes de pared</li> <li>- Purgador</li> <li>- Kit de cobertura tubo</li> <li>- Válvula/diesel Quadro, Pg 315</li> <li>- Adaptadores</li> </ul>	<ul style="list-style-type: none"> <li>- Stahl</li> <li>- InoxyStahl</li> <li>- Wandhalterungen</li> <li>- Entlüftungsventil</li> <li>- Rohrverklebungssatz</li> <li>- Ventil/diesel Quadro, Pg 315</li> <li>- Anschlüsse</li> </ul>
<ul style="list-style-type: none"> <li>- Acciaio</li> <li>- Cerniera caviglia Sincroco H</li> <li>- For for</li> <li>- Cromo</li> <li>- Acciaio inox</li> <li>- Spazzolato</li> </ul>	<ul style="list-style-type: none"> <li>- Steel</li> <li>- Cerniera caviglia Sincroco H</li> <li>- For for</li> <li>- Chrome</li> <li>- Acier inox</li> <li>- Brossé</li> </ul>	<ul style="list-style-type: none"> <li>- Acier</li> <li>- Cerniera caviglia Sincroco H</li> <li>- For for</li> <li>- Chrome</li> <li>- Acier inox</li> <li>- Brossé</li> </ul>	<ul style="list-style-type: none"> <li>- Acero</li> <li>- Cerniera de caviglia Sincroco H</li> <li>- Hierro en bruto</li> <li>- Cromo</li> <li>- Acero inoxidable</li> <li>- Cepillado</li> </ul>	<ul style="list-style-type: none"> <li>- Stahl</li> <li>- Cernierhülfe von Sincroco H</li> <li>- Rohrbol</li> <li>- Chrom</li> <li>- InoxyStahl</li> <li>- Gebürstet</li> </ul>
<ul style="list-style-type: none"> <li>- Fornito con cavo 1,150 cm e presa Schuko. Dotato di pulsante ON/OFF</li> </ul>	<ul style="list-style-type: none"> <li>- Furnished with cable 1,150 cm and Schuko plug. Equipped with ON/OFF button</li> </ul>	<ul style="list-style-type: none"> <li>- Fourni avec câble 1,150 cm et prise Schuko. Equipé avec le bouton ON/OFF</li> </ul>	<ul style="list-style-type: none"> <li>- Se suministra con cable 1,150 cm and incluye Schuko. Equipado con el interruptor ON/OFF</li> </ul>	<ul style="list-style-type: none"> <li>- Komplet mit Kabel 1,150 cm und SchukoStecker. Mit Aus-Schalter</li> </ul>
<ul style="list-style-type: none"> <li>- Altracci: 3/8" G</li> <li>- Pressione massima d'esercizio: 5 bar</li> <li>- Ogni articolo viene fornito con dritta per interasse valvole e posizione fissaggi a muro</li> <li>- Non disponibile per impianti montato su parete</li> </ul>	<ul style="list-style-type: none"> <li>- Connections: 3/8" G</li> <li>- Maximum working pressure: 5 bar</li> <li>- Each item is supplied with a template for the centre distance between the valves and the position for wall fixing</li> <li>- Not available for single tube installation</li> </ul>	<ul style="list-style-type: none"> <li>- Connexion: 3/8" G</li> <li>- Pression maximale de service: 5 bar</li> <li>- Chaque article est livré avec un gabarit pour entreaxe de soupapes et position de fixations murales</li> <li>- Non disponible pour installations murales</li> </ul>	<ul style="list-style-type: none"> <li>- Conexiones: 3/8" G</li> <li>- Presión máxima de trabajo: 5 bar</li> <li>- Todos los artículos se suministran con plantilla para calcular la distancia entre ejes de las válvulas y la posición de los elementos de fijación a la pared.</li> <li>- No disponible para instalaciones murales</li> </ul>	<ul style="list-style-type: none"> <li>- Anschlüsse: 3/8" G</li> <li>- Maximale Betriebsdruck: 5 bar</li> <li>- Jeder Artikel wird mit einer Schablone zur Bestimmung des Ventilabstands und der Wandbefestigungen geliefert</li> <li>- Nicht für Einrohr-Anlagen verfügbar</li> </ul>

KIT INCASSO TERMOSTATICO Pg 257	KIT TERMOSTATICO Pg 273	KIT TERMOSTATIQUE Pg 287	KIT THERMOSTATICS Pg 301	THERMOSTAT SAFETY Pg 315
---------------------------------	-------------------------	--------------------------	--------------------------	--------------------------

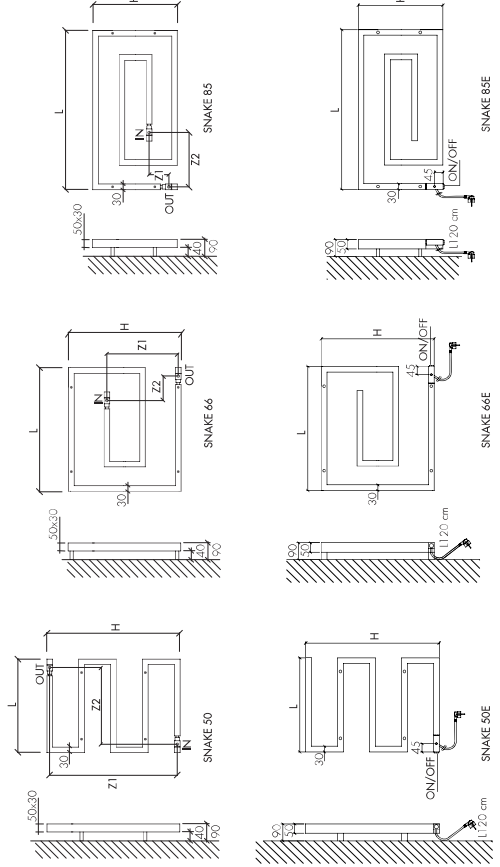

ART.	DIMENSIONI DIMENSIONS				RESA BESA CROMO CAP OUT. OUT. CHROME CARAC. WELG. RESET.		PESO RESA EL. WEIGHT		ELETTRICO ELECTRIC
	L	H	Z1	Z2	W	W	W	W	
Snake 50	500	710	680	410	285	230	5,2	0,6	130
Snake 66	600	600	380	130	290	235	5,4	7,1	120
Snake 85	850	450	110	290	305	245	8,2	8,2	132

NOTE: THE RECESSED MODEL IS AVAILABLE IN THE FOLLOWING DIMENSIONS: STANDARD MAX Z1 = 1120 cm, MAX Z2 = 1120 cm. FOR THE RECESSED MODEL, THE NUMBER OF THE CONNECTION IS STANDARD COEFFICIENT 2. THE RECESSED MODEL IS AVAILABLE IN THE FOLLOWING DIMENSIONS: STANDARD MAX Z1 = 1120 cm, MAX Z2 = 1120 cm. FOR THE RECESSED MODEL, THE NUMBER OF THE CONNECTION IS STANDARD COEFFICIENT 2.